

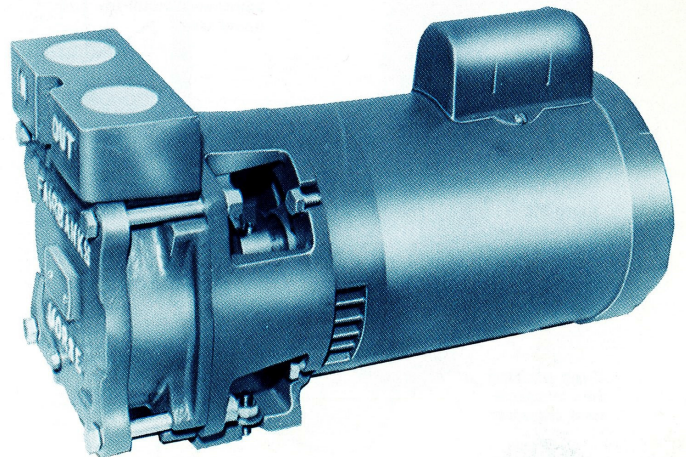


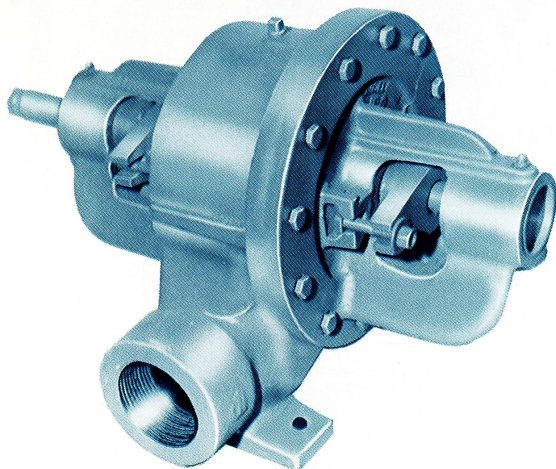

REGENERATIVE TURBINES

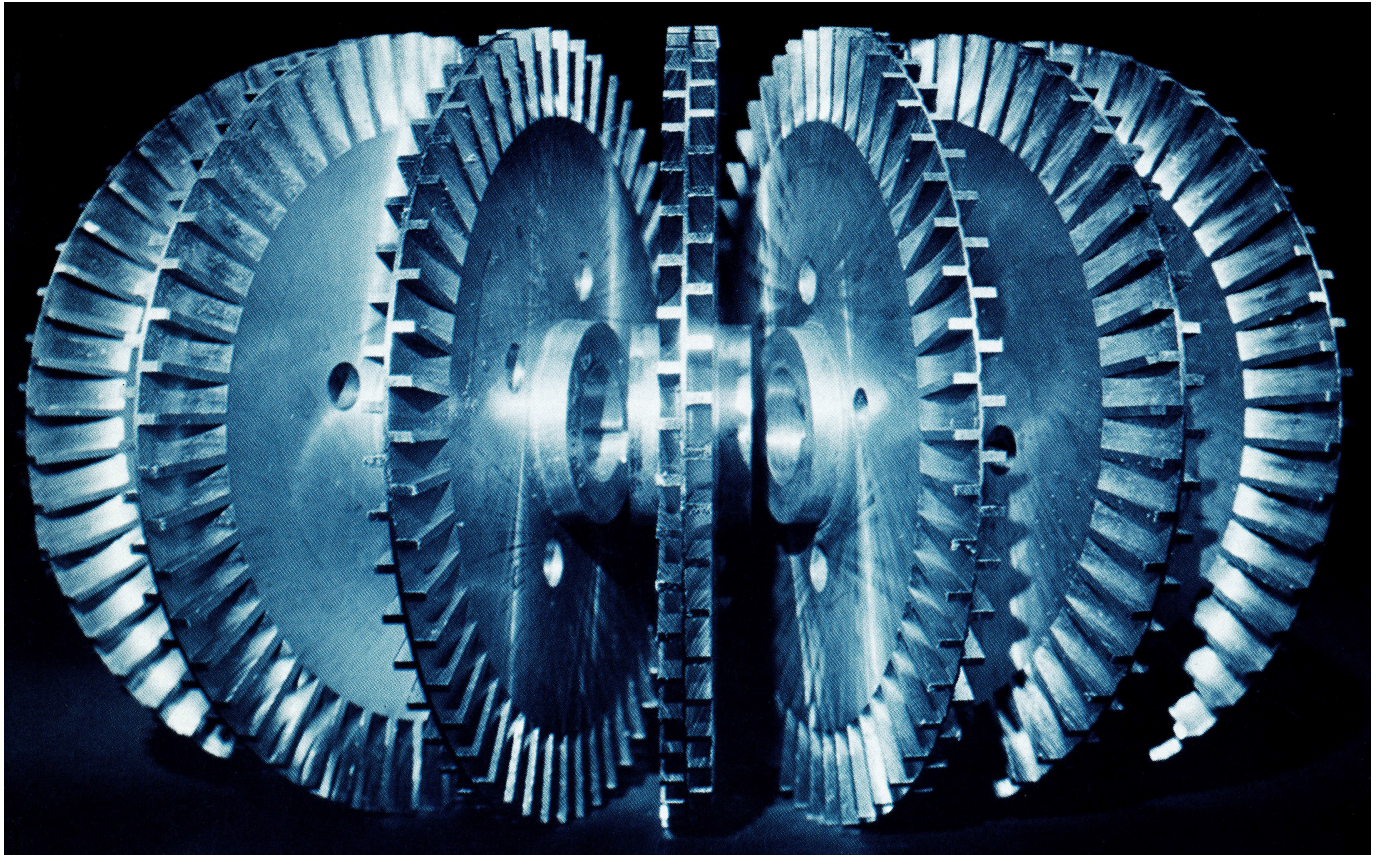

MEPCO's Regenerative Turbine Pumps - Features

MEPCO, the original turbine pump, has led the industry for 55 years with the ultimate in design features, efficiency and durability. MEPCO regenerative turbines are ideally suited for applications where vaporous fluids are being handled at low flows and moderate to high pressures.

MEPCO was first to offer the floating impeller which automatically centered between liner rings. This eliminated the guesswork of centering with adjusting nuts. Optimum performance is always delivered without worry of metal-to-metal contact through a wide range of temperature.


MEPCO pumps operate on steep H-Q curves which allow the units to deliver near constant flow regardless of changes in pressure requirements. This is important to the system designer since he can rely on capacity with unpredictable pressure variations.

MEPCO's vertically split housing is designed so that maintenance can be performed without disturbing the system plumbing. Performance

can be restored to "like new" by merely replacing the impeller and liner rings. Should your system H-Q requirements change, this can normally be accommodated with a different set of liners and impeller; no change to the housing or plumbing... a savings directly measured in dollars for parts and down time.

MEPCO pumps thrive on vaporous fluid. Many liquids vaporize at room temperature. These, as well as hot water, steam/air and refrigerants are handled without vapor lock or NPSH problems. The pump's self-venting characteristics simply carry the bubbles/vapors along with the fluid to the discharge port without a hint of vapor lock.

MEPCO pumps excel on applications where higher suction lifts are required. Whether the liquid is at normal temperature or hot, the turbine pump will outlift the centrifugal type due to its air handling capability and close running internal clearances.




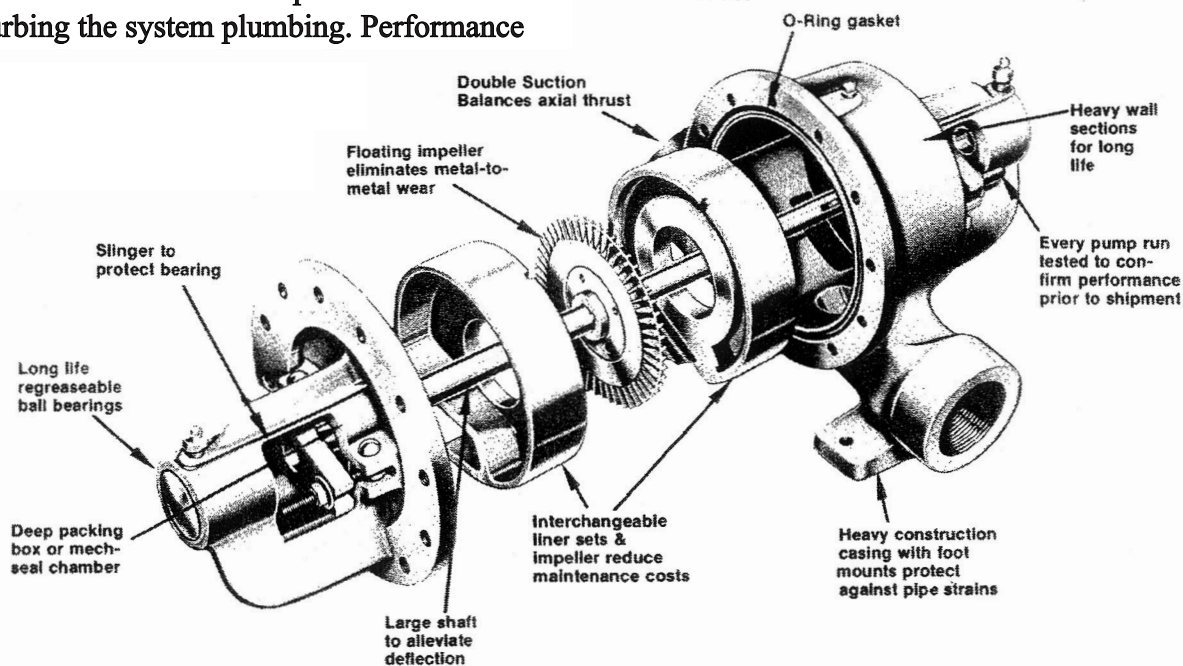


Principle of Operation

The MEPCO regenerative turbine pumps acquired their name from the numerous "buckets" which are machined into the impeller's periphery. The companion parts, the liner rings, enclose the impeller and redirect the liquid particles to the buckets to perpetuate the regenerative pressure development.

Figure 1 depicts liquid entering the pump inlet where the flow is divided to both sides of the impeller. Liquid is immediately picked up by the "buckets" and pumped about the liner ring channel as shown in Figure 2. This pumping action is repeated on a given droplet many times as it is pumped toward the discharge port. Centrifugal forces and shearing action combine to add energy each time the droplet passes through a bucket. Pressure is developed progressively higher as liquid approaches the discharge. The flow is smooth, continuous and non-pulsating as the fluid from each side of the impeller rejoins at the discharge port at extremely high heads.

Figure 3 compares the performance of MEPCO pumps versus centrifugal for the low capacity, high head applications. Horsepower increases as the pressure increases, not capacity as in a centrifugal pump. And, of course, the steeper H-Q curve offers less change in capacity with pressure demand variations.

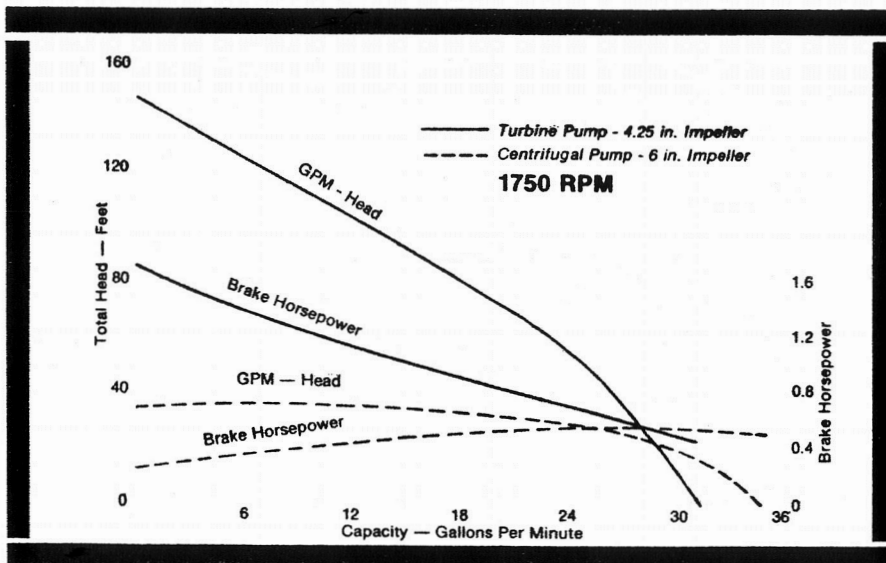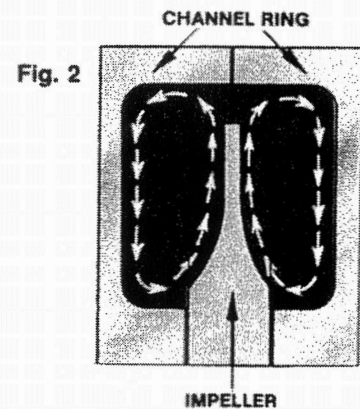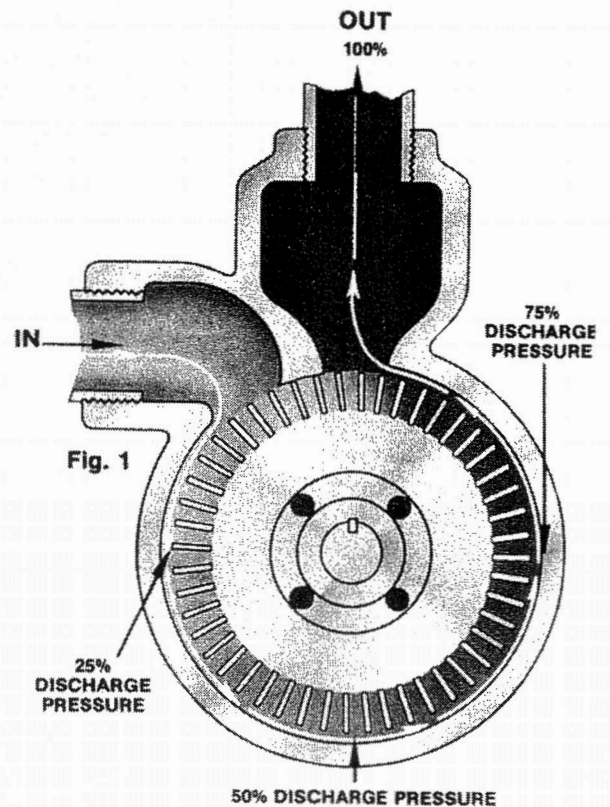

Applications

The MEPCO regenerative turbine can be used for a wide range of services and applications due to its excellent suction characteristics, ability to handle entrained vapors/gases, high temperature capability without internal binding, high pressure reserve and slower rotation assuring long life.

Typical applications found in boilerhouses, chemical plants, canneries, dairies, greenhouses, cement plants, distilleries, breweries, boats/ships and factories.

Boiler feed	Booster service	Car washers
Condensate return	Refrigeration	Petroleum pumping
Jockey service	Hot/volatile liquids	Caustic fluids
Sump service (clear water)	Marine (potable water)	Viscous fluids
Brine circulation	Water treatment	Chemicals
Coolant pumping	Refineries	

CONSTRUCTION MATERIALS

Bronze fitted (BF) pumps are considered standard construction and are stocked at the factory at all times. Parts inventory for All Iron (AI) and All Bronze (AB) are maintained to build these options. Stainless steel is offered in several pump families; these must be quoted from the factory.

PART	BRONZE FITTED	ALL IRON	ALL BRONZE
Body.....	Cast Iron.....	CI.....	Bronze
Cover.....	Cast Iron.....	CI.....	Bronze
Liners.....	Bronze.....	CI.....	Bronze
Impeller.....	Bronze.....	CI.....	Bronze
Shaft.....	Stainless Steel-416.....	St. Stl.....	St. Stl.
Glands.....	Cast Iron.....	CI.....	Bronze
Packing.....	Graphite.....	GA.....	GA
Gasket.....	Neoprene.....	N.....	N

LIMITATIONS


S.S.U.	DECREASED CAPACITY	INCREASE H.P.
UP to 200	0	0
201 to 300	15%	25%
301 to 400	25%	40%
401 to 600	35%	50%

MEPCO pumps are capable of handling viscosities to 600 S.S.U. and temperatures to 210°F maximum. When pumping viscous fluids, the following guidelines should be considered:

PACKING, GASKET, SHAFT, BEARING & GLAND CHART													
FIGURE NUMBER	Stuffing Box Packing	"O" Ring Cover Gasket	Shaft	Bell Brg or Equal	Stuffing Box	Stuffing Box Gland							
	# Pack Rings Per/stuff	Box (2) Pack size	Size	Max Size	Dia @ coup. end	Drive End	Opposite Drive End	I.D.	O.D.	Depth	O.D.	I.D.	Max Insert
6801	1/4" seal Type 2	BT2C1	3/16x5%	Stub shaft	Stub shaft	See Mfr. mfg. parts	See Mfr. mfg. parts	Seal	Seal	Seal	Seal	Seal	Seal
B5	1/4" seal Type 2	BF2C1	1/4x7-31/64	.6870	.589	202	202	Seal	Seal	Seal	Seal	Seal	Seal
6830	10	1/4x1/4x3 1/4	1/4x7-31/64	.6870	.589	202	202	11/16	1-3/16	1-19/32	1.184	.467	1/4"
B6													
6830	10	1/4x1/4x4 1/4	1/4x7-31/64	.8745	.786	204	204	1/4"	1-11/16	2-5/32	1.684	.780	1/4"
B7													
6853	12	1/4x1/4x5 1/4	1/4x8-9/16	1.374	.874	305	305	2.125	3	2 1/2	2.112	1-7/16	1/4"
6840	10	1/4x1/4x3 1/4	3/16x5%	.6870	.589	202	202	11/16	1-3/16	1-13/16	1.184	.465	1/4"
6880	10	1/4x1/4x4 1/4	1/4x6-15/16	.8745	.785	204	204	.905	1.685	2 1/4	1.674	.940	1/4"

Pump Selection Charts

For NPSHR and detailed performance refer to appropriate curve.

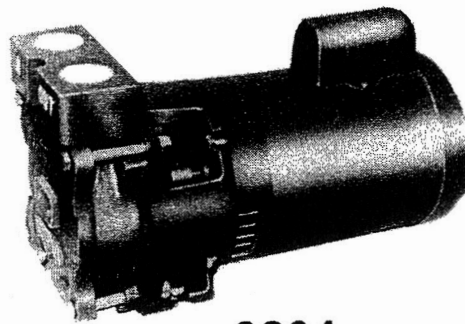

6801


NEMA C flange motor at either 1750 or 3450 RPM with mechanical seals.
High performance in a very small package. (Max. 3 HP)

1750 RPM		1 1/4" Suction, 1 1/4" Discharge		TOTAL HEAD IN FEET OF WATER										CURVE NO.
Model 6801, 6820 & 6821		20	30	40	50	60	80	100	125	150	175			
SR4R-4, 6801-4	GPM	2.0	1.6	1.3	1.0	.70						1		
6821-4, 6821A-4	Motor	1/4	1/4	1/4	1/4	1/4								
SR4R-6, 6801-6	GPM	3.6	3.1	2.7	2.2	1.8	1.0					2		
6821-6, 6821A-6	Motor	1/4	1/4	1/4	1/4	1/4	1/4							
SR4R-8, 6801-8	GPM	7.0	6.4	5.9	5.4	4.8	3.8	2.8	1.6			3		
6821-8, 6821A-8	Motor	1/4	1/4	1/4	1/4	1/4	1/4	1/3	1/3					
SR4R-8B, 6801-8B	GPM	9.0	8.3	7.7	7.0	6.4	5.2	4.1	2.7	1.5		4		
6821-8B, 6821A-8B	Motor	1/4	1/4	1/4	1/3	1/3	1/2	1/2	1/4	1/4				
SR4R-9, 6801-9	GPM	11.0	10.5	10.0	9.3	8.7	7.6	6.5	5.2	4.0	3.0	5		
6821-9, 6821A-9	Motor	1/4	1/4	1/4	1/3	1/3	1/2	1/2	1/4	1/4	1/4			
SR4R-10, 6801-10	GPM	14.0	13.4	12.6	11.8	11.2	9.9	8.6	7.0	5.4	4.0	6		
6821-10, 6821A-10	Motor	1/4	1/3	1/3	1/2	1/2	1/2	1/2	1/4	1	1			
SR4R-11, 6801-11	GPM	17.8	16.8	15.8	15.0	14.4	13.2	12.0	10.4	9.0		7		
6821-11, 6821A-11	Motor	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1	1				
SR4R-12, 6801-12	GPM	23.0	22.0	21.0	19.8	18.0	15.0	10.8	5.5			8		
6821-12, 6821A-12	Motor	1/3	1/2	1/2	1/2	1/2	1/2	1	1					
SR4R-13, 6801-13	GPM	28.0	26.0	25.0	23.0	22.0	19.0	15.5				9		
6821-13, 6821A-13	Motor	1/2	1/2	1/2	1/2	1/2	1	1						

3450 RPM		1 1/4" Suction, 1 1/4" Discharge		TOTAL HEAD IN FEET OF WATER										CURVE NO.
Model 6801		100	150	200	250	300	350	400	450	500	550			
6801-4	GPM	3.8	3.2	2.5	1.8	1.3	0.8					10		
	Motor	1/3	1/2	1/2	1/4	1/4	1/4							
6801-6	GPM	6.1	4.8	3.5	2.4	1.2						11		
	Motor	1/2	1/4	1/4	1	1								
6801-8	GPM	12.4	11	9.8	8.6	7.4	6.4	5.4	4.2	3.2	2.3	12		
	Motor	1	1 1/2	1 1/2	2	2	2	3	3	3	3			
6801-8B	GPM	15.6	14	12.8	11.4	10	8.6	7.4	6			13		
	Motor	1	1 1/2	1 1/2	2	2	3	3	3					

Pump Selection Charts


For NPSHR and detailed performance refer to appropriate curve.

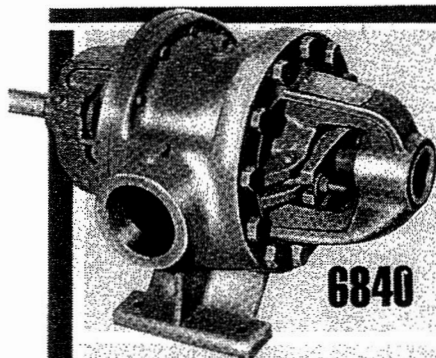

6840

2" Suction, 1½" Discharge		TOTAL HEAD IN FEET OF WATER 1750 RPM								CURVE NO.
Model		20	30	40	50	60	80	100		
6840										
CR405	GPM	9.6	9.0	8.4	7.8	7.3	6.1	5.0		19
	Motor	½	½	½	½	¾	¾	¾		
CR410	GPM	14.0	13.4	12.5	11.8	11.0	9.6	8.4		20
	Motor	½	½	¾	¾	¾	¾	¾		
CR415	GPM	27.3	25.8	24.0	22.5	20.9	17.2	13.0		21
	Motor	¾	¾	¾	¾	1	1	1		
CR420	GPM	37.4	35.0	32.0	28.8					22
	Motor	¾	¾	¾	1					
CR429	GPM	47.5	45.0	42.5	40.2	37.5	30.7			23
	Motor	¾	1	1	1	1½	1½			


2" Suction, 1½" Discharge				TOTAL HEAD IN FEET OF WATER										3450 RPM		CURVE NO.
Model																
6840		125	150	175	200	225	250	275	300	350	400	450	500			
CR405	GPM	17.0	16.8	16.2	16.0	15.2	15.0	14.5	14.0	13.0	11.0	9.0	7.8	24		
	Motor	1½	1½	2	2	2	3	3	3	3	5	5	5			
CR410	GPM	26.0	25.0	24.0	23.0	22.0	21.0	19.0	18.0	17.0	16.0	15.0	13.0	25		
	Motor	2	3	3	3	3	3	3	5	5	5	5	5			
CR415	GPM	47.5	46.0	44.0	42.5	40.0	38.0	36.0	33.0	28.0	22.0			26		
	Motor	3	5	5	5	5	5	5	7½	7½	7½					
CR420	GPM	64.0	62.0	58.0	50.0	40.0	26.0							27		
	Motor	5	5	5	5	7½	7½									
CR429	GPM	80.0	80.0	79.0	77.0	75.0	70.0	65.0	60.0					28		
	Motor	5	7½	7½	7½	7½	10	10	10							



6830 B-5

Standard with either packing or standard type 2 mechanical seals.

1½" Suction, 1¼" Discharge		TOTAL HEAD IN FEET OF WATER 1750 RPM														CURVE NO.
Model		20	30	40	50	60	80	100	125	150	175	200	250	300	350	
6830	B-5															
BR	GPM	9.2	8.8	8.5	8.1	7.8	7.2	6.6	5.9	5.2	4.6	4.0	3.0	2.0		29
505	Motor	¼	¼	¼	1/3	1/3	½	½	½	¾	¾	¾	1	1		
BR	GPM	12.3	11.8	11.4	11.0	10.5	9.8	9.2	8.3	7.5	6.6	5.8	4.2	2.7	1.4	30
506	Motor	1/3	½	½	½	½	½	¾	¾	¾	1	1	1½	1½	1½	
BR	GPM	13.5	13.0	12.7	12.3	12.2	11.3	11.0	10.0	9.2	8.4	7.6	5.8	4.2	3.1	31
507	Motor	1/3	½	½	½	½	½	¾	¾	¾	1	1	1½	1½	2	
BR	GPM	18.0	17.4	16.8	16.2	15.7	14.5	13.3	11.8	10.0	8.6	6.8				32
515	Motor	1/3	½	½	½	½	¾	¾	1	1	1½	1½				
BR	GPM	20.5	20.0	19.6	19.2	18.7	17.8	16.8	15.8	14.6	13.4	12.3	10.0			33
605	Motor	¾	¾	¾	¾	1	1	1	1½	1½	1½	2	2			
BR	GPM	25.0	24.0	23.5	23.0	22.5	21.5	20.5	19.0	18.0	17.0	15.5	14.0	11.5		34
610	Motor	¾	¾	¾	¾	¾	1	1½	1½	1½	2	2	3	3		
BR	GPM	38.5	37.2	36.5	35.5	34.5	32.7	31.0	29.0	27.0	25.2	23.5	20.0	17.0		35
615	Motor	¾	1	1	1	1½	1½	1½	2	2	3	3	3	5		



6830 B-6

Model	2½" Suction, 2½" Discharge				TOTAL HEAD IN FEET OF WATER 1750 RPM										CURVE NO.
6830	B-6	20	30	40	50	60	80	100	125	150	175	200	250		
BR	GPM	56.0	54.0	52.0	50.0	47.5	42.0	36.0	28.7						
520	Motor	¾	1	1	1	1½	1½	2	3					36	
BR	GPM	71.0	68.0	65.0	61.5	58.0	50.5	42.5	30.0						
525	Motor	1	1	1½	1½	2	2	3	3					37	
BR	GPM	97.0	92.5	87.5	83.0	76.0	61.5								
530	Motor	1	1½	1½	2	2	3							38	
BR	GPM	160.0	156.0	151.0	144.0	136.0	116.0	93.0							
540	Motor	3	3	3	5	5	5	7½						39	
BR	GPM	53.7	52.3	50.7	49.1	48.0	45.2	42.7	39.5	37.0	34.0	31.2	26.0		
620	Motor	1½	1½	1½	1½	2	2	3	3	3	5	5	5	40	
BR	GPM	71.0	71.0	71.0	68.5	66.0	61.5	57.5	52.0	47.5	43.0	38.5	31.0		
625	Motor	1½	1½	1½	2	2	3	3	5	5	5	5	7½	41	
BR	GPM	87.4	83.5	82.0	80.3	78.5	74.0	70.0	63.0	55.5	47.0	37.5			
630	Motor	1½	1½	2	2	3	3	3	5	5	5	7½		42	
BR	GPM	109.0	106.0	104.0	102.0	100.0	95.0	91.0	86.0	80.0	75.0	69.0	53.0		
639	Motor	2	2	3	3	3	3	5	5	5	7½	7½	10	43	
BR	GPM	119.5	119.5	119.5	116.0	112.5	105.0	97.0	87.0	76.0	65.0	51.0			
640	Motor	2	2	3	3	3	5	5	5	7½	7½	7½		44	
BR	GPM	179.0	172.0	167.0	161.0	155.0	145.0	136.0	123.0	110.0	93.0	74.0			
646	Motor	3	3	5	5	5	5	7½	7½	10	10	10		45	

Pump Selection Charts

For NPSHR and detailed performance refer to appropriate curve.

6853

		3" Suction, 2½" Discharge			TOTAL HEAD IN FEET OF WATER 1750 RPM																CURVE NO.
Model		20	30	40	50	60	80	100	125	150	175	200	250	300	350						
6853	BR GPM	72.6	71.3	70.0	69.0	67.5	65.0	63.0	59.5	57.0	54.0	51.5	46.5	41.5	36.0	46					
732	Motor	2	2	2	3	3	3	3	5	5	5	5	7½	7½	7½						
BR	GPM	86.4	85.3	84.3	83.0	82.0	79.2	77.0	73.8	70.5	67.2	64.0	57.2	50.0	43.0	47					
735	Motor	3	3	3	3	5	5	5	5	5	7½	7½	7½	10	10						
BR	GPM	98.0	97.0	95.8	94.5	93.0	91.0	88.2	85.0	82.0	79.0	75.5	69.0	62.6	56.0	48					
736	Motor	3	3	3	5	5	5	5	7½	7½	7½	10	10	15	15						
BR	GPM	139.0	137.0	135.0	133.0	132.0	128.0	123.0	118.0	112.0	106.0	99.0	85.0	71.0	55.0	49					
740	Motor	5	5	5	5	5	5	7½	7½	7½	10	10	15	15	20						
BR	GPM	198.0	196.0	193.0	190.0	188.0	183.0	172.0	167.0	152.0	143.0	132.0	104.0			50					
745	Motor	5	5	5	5	5	7½	7½	10	10	15	15	15								

TWO-STAGE

6880

		1¼" Suction, 1¼" Discharge				TOTAL HEAD IN FEET OF WATER 1750 RPM																CURVE NO.	
Model		50	100	150	200	250	300	350	400	450	500	600	*700	*800	*900								
6880																						51	
BR2	GPM	14.0	13.1	12.1	11.1	10.2	9.2	8.2	7.3	6.3	5.4	3.6	1.7										
507	Motor	1	1	1½	1½	2	2	2	3	3	3	3	3									52	
BR2	GPM	22.0	20.0	18.2	16.6	15.0	13.6	12.2	11.0	9.6	8.4	6.0	1.7										
605	Motor	1½	1½	2	2	3	3	3	3	5	5	5	5									53	
BR2	GPM	30.1	27.5	25.4	21.4	20.0	18.6	17.3	16.0	14.6	13.4	11.2	9.0	7.2	5.2								
610	Motor	2	2	3	3	3	5	5	5	5	5	7½	7½	7½	10							54	
BR2	GPM	39.0	36.5	34.0	31.2	28.7	26.5	24.0	21.8	19.5	17.5	12.5	8.5	5.2	2.5								
615	Motor	2	3	3	5	5	5	5	7½	7½	7½	10	10	10	10							55	
BR2	GPM	62.0	57.0	50.0	44.5	39.5	35.0	31.0	27.5	24.5	21.5	15.5	10.0	5.0									
620	Motor	2	3	3	5	5	7½	7½	7½	10	10	10	15	15									

*These ratings require use of ductile iron cases.

ENGINEERING SPECIFICATIONS

The contractor shall furnish (and install as shown on the plans) a MEPCO regenerative turbine pump model _____ size _____ (Bronze Fitted) (All Iron) (All Bronze). Each pump shall have a capacity of _____ G.P. M. when operating at a total head of _____ feet at the specified temperature, viscosity, specific gravity, and NPSH. The speed of the pump shall not exceed (1750) (3450) R.P.M. The pump is to be furnished with (packing) (mechanical seals.)

The pump shall be of vertical split case design and the liner rings shall be replaceable without disturbing system plumbing. The suction and discharge connections shall be cast integral with the casing. The casing and bearing housings shall be cast of 25,000 pound tensile strength cast iron.

The impeller(s) shall be located on the stainless steel shaft between grease lubricated ball bearings.* The impeller shall be hydraulically self-centering and no external adjustment shall be necessary.

Each pump shall be tested at the head and capacity specified prior to shipment.

The pump shall be (Close) (mounted on a steel baseplate and flexibly) coupled to a _____ HP _____ phase _____ cycle voltage _____ R.P.M., horizontal (dripproof) (totally enclosed) (explosion proof) motor. The motor shall be sized to prevent overloading at the highest head condition listed in the specifications.

* Excluding overhung impeller design

Dimensions

1. Not for construction unless certified.
2. Weights are approximate and dimensions $\pm 1/8"$.
3. Frame sizes are for open drip-proof motors.
4. Flanges are standard flat face.


LEGEND:

- A - Pump-Motor Length
- B - Height Including Base
- C - Discharge and Suction Spacing
- D - Base Width

6801

-4 Thru -13
1 1/4 Disch. - 1 1/4 Suct.


HP	FR	A	B	C	D	WT
1/3	56	13 3/4	9	3	7	55
1/2	56	14	9	3	7	60
3/4	56	14 3/4	9	3	7	65
1	56	15 1/2	9	3	7	70

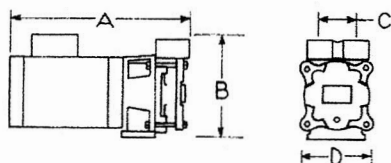

6840

CR-405, 410, 415,
420, 429
1 1/2 Disch. - 2 Suct.


HP	FR	A	B	C	D	WT
1	143T	28 3/4	10 3/4	9 3/4	12	150
2	145T	27 1/2	10 3/4	9 3/4	12	161
3	182T	28 3/4	10 3/4	9 3/4	12	190
5	184T	29 3/4	10 3/4	9 3/4	12	213
7 1/2	213T	30 3/4	12 3/4	9 3/4	12	249
15	254T	35 3/4	13 3/4	9 3/4	12	392

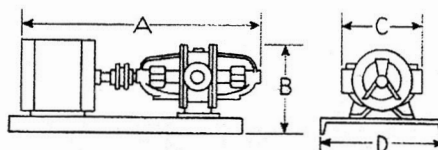

6830 B-5

BR505, 507, 515,
605, 610, 615
1 1/4 Disch. - 1 1/4 Suct.


HP	FR	A	B	C	D	WT
1	143T	25 1/2	13 3/4	11	12	142
2	145T	26 1/2	13 3/4	11	12	155
3	182T	27 3/4	12 3/4	11	12	185
5	184T	28 3/4	12 3/4	11	12	205
7 1/2	213T	29 3/4	14 3/4	11	12	245

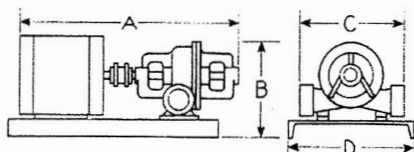

6830 B-6

BR520, 525, 530, 540,
620, 625, 630, 639,
640, 646
2 1/2 Disch. - 2 1/2 Suct.


HP	FR	A	B	C	D	WT
2	145T	31 1/4	15 3/4	14 1/2"	12	205
3	182T	32 3/4	14 3/4	14 1/2"	12	235
5	184T	33 3/4	14 3/4	14 1/2"	12	260
7 1/2	213T	34 3/4	14 3/4	14 1/2"	12	295
10	215T	36 3/4	15 3/4	14 1/2"	15	325
15	254T	39 3/4	15 3/4	14 1/2"	15	400

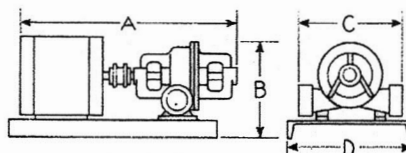

6853

BR732, 735, 736
740, 745
2 1/2 Disch. - 3 Suct.


HP	FR	A	B	C	D	WT
7 1/2	213T	37 3/4	16 3/4	14 3/4	15	385
10	215T	38 3/4	16 3/4	14 3/4	15	415
15	254T	42	16 3/4	14 3/4	15	530
20	256T	43 3/4	16 3/4	14 3/4	15	560
25	284T	44 3/4	16 3/4	14 3/4	15	595

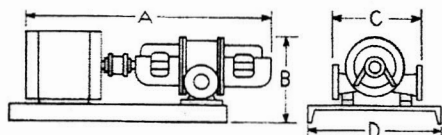

6880

BR2-507, 605, 610,
615, 620
1 1/4 Disch. - 1 1/4 Suct.

HP	FR	A	B	C	D	WT
2	145T	31 1/4	16	3 1/4"	12	185
3	182T	33 3/4	15 3/4	3 1/4"	12	200
5	184T	34 3/4	15 3/4	3 1/4"	12	215
7 1/2	213T	35 3/4	16 3/4	3 1/4"	12	245
10	215T	36 3/4	16 3/4	3 1/4"	12	250
15	254T	40 3/4	16 3/4	3 1/4"	12	380

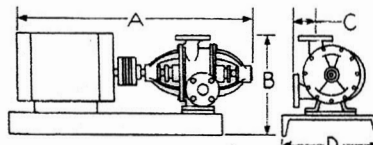

3695 44th Street SE, Grand Rapids, Michigan 49512

Phone 616.971.3420 Fax 616.971.3421

www.mepcollc.com